

SURGiNG

紹 鑫 實 業



Fuses



保险丝

12B Series

12B RoHS Compliant



贴片保险丝(快断型) SMD Fuse (Fast-Acting) 125V

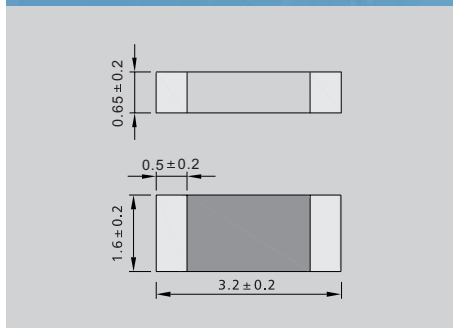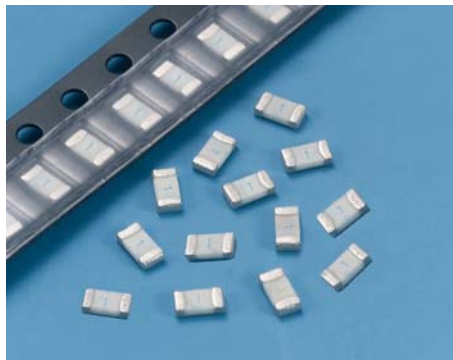

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	标示 Marking	熔化热能 ² Melting Integral (A ² .S)
12B0250B	250mA	125V	.25	0.0035
12B0375B	375mA	125V	E	0.0011
12B0500B	500mA	125V	0.5	0.0020
12B0750B	750mA	125V	.75	0.0053
12B1100B	1A	125V	1	0.0062
12B1125B	1.25A	125V	J	0.022
12B1150B	1.5A	125V	1.5	0.028


认证 Approvals	电流范围 Ampere Range	证书号 Certificate No.
	250mA~1.5A	E221465

额定分断能力

Interrupting Rating:

50 Amperes at 125V AC/DC

Time-Current Characteristics
电流-时间曲线图

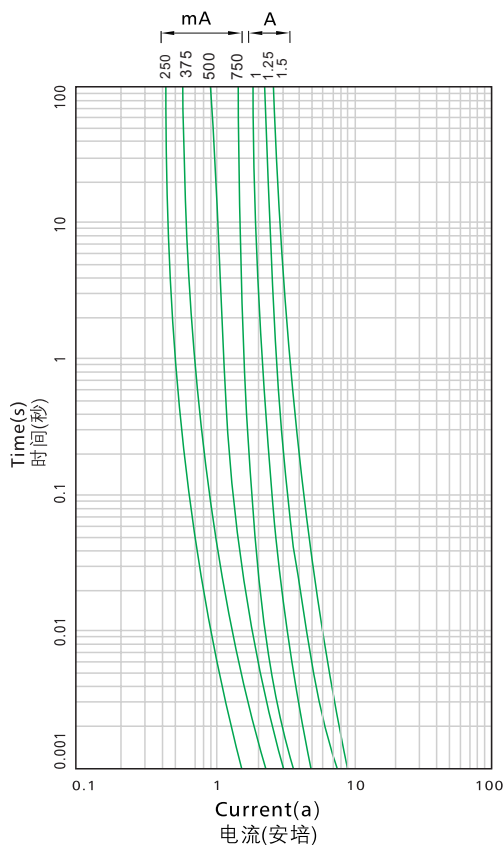

电气特性 Electrical Characteristics:

额定电流 Ampere Rating	额定电流的% % of Ampere Rating	熔断时间 Opening Time
250mA~1.5A	100%	4 hours Min(大于4小时)
250mA~1.5A	250%	5 s Max(小于5秒)

工作温度 Operating Temperature

-40°C ~ +125°C

材料 Materials

Substrate: ceramic/glass cover
Termination: silver over-plated with nickel and tin
Element: silver

焊接方法 Soldering Method

Solder reflow: 260°C, 10 s max.

包装 Packaging

Automaton taped 3000PCS per reel, 30000PCS per carton.