

SURGiNG

紹 鑫 實 業



Fuses



保险丝

3R Series


3R $\Phi 4 \times 12$ RoHS Compliant



超小型保险丝(延时型) Micro Fuse (Time-Lag) 350V

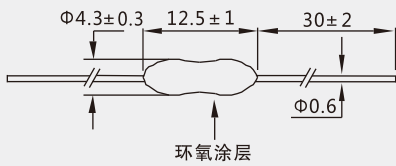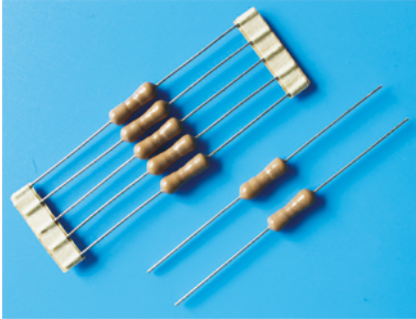

Time-Current Characteristics
电流-时间曲线图

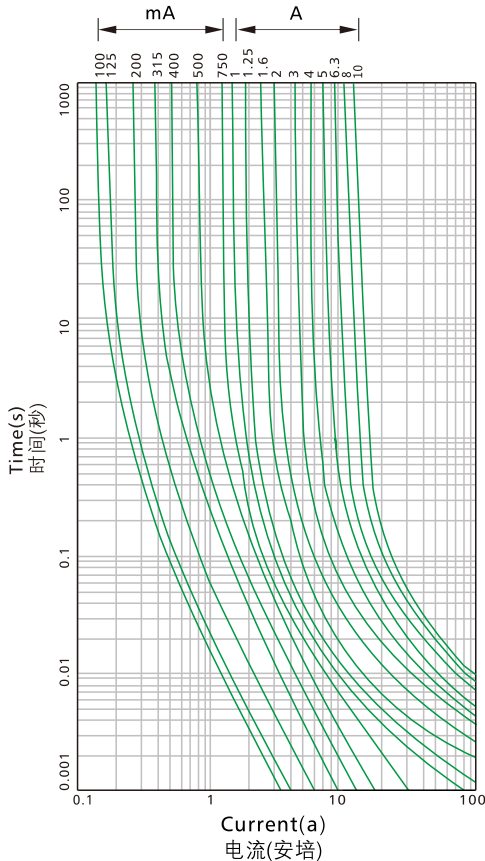

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	熔化热能 ² Melting Integral (A ² .S)
3R0100H	100mA	350V	0.01
3R0125H	125mA	350V	0.02
3R0160H	160mA	350V	0.04
3R0200H	200mA	350V	0.07
3R0250H	250mA	350V	0.08
3R0300H	300mA	350V	0.13
3R0315H	315mA	350V	0.16
3R0350H	350mA	350V	0.18
3R0400H	400mA	350V	0.35
3R0500H	500mA	350V	0.48
3R0630H	630mA	350V	0.70
3R0750H	750mA	350V	0.75
3R0800H	800mA	350V	0.80
3R1100H	1A	350V	1.0
3R1125H	1.25A	350V	1.9
3R1150H	1.5A	350V	2.5
3R1160H	1.6A	350V	3.2
3R1200H	2A	350V	7.0
3R1250H	2.5A	350V	10
3R1300H	3A	350V	11
3R1315H	3.15A	350V	12
3R1350H	3.5A	350V	15
3R1400H	4A	350V	19
3R1500H	5A	350V	28
3R1630H	6.3A	350V	50
3R1800H	8A	350V	69
3R2100H	10A	350V	98

目录编号: Catalog No. H:350V

认证 Approvals	电流范围 Ampere Range	证书号 Certificate No.
	100mA~10A	E221465

额定分断能力:

Interrupting Rating:
100 Amperes at 350V AC

测试标准:

Testing Standard: UL248-14

电气特性 Electrical Characteristics:

额定电流的% % of Ampere Rating	熔断时间 Opening Time
100%	4 hours Min (大于4小时)
200%	1s~60s