


4E $\Phi 4.6 \times 15$ RoHS Compliant



玻璃保险丝管(延时型)

Glass Tube Fuse (Time-Lag) 250V/125V

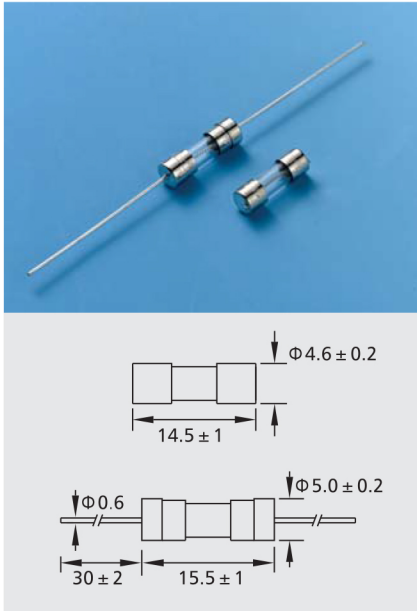

测试标准:

Testing Standard:
UL248-1 UL248-14

额定分断能力:

Interrupting Rating:
10000 Amperes at 125V AC
35 Amperes at 250V AC(100mA~1A)
100 Amperes at 250V AC(1.25A~6.3A)

工作温度:

Operating Temperature:
-55°C ~ +125°C

材料:


Materials:
End cap:nickel plated brass
Glass tube:glass
Lead wire:tinned copper wire
Inner cap:nickel plated brass

焊接方法:

Soldering Method:
Wave soldering: 260°C, 10s max
Manual soldering: 350°C, 5s max

Time-Current Characteristics

电流-时间曲线图

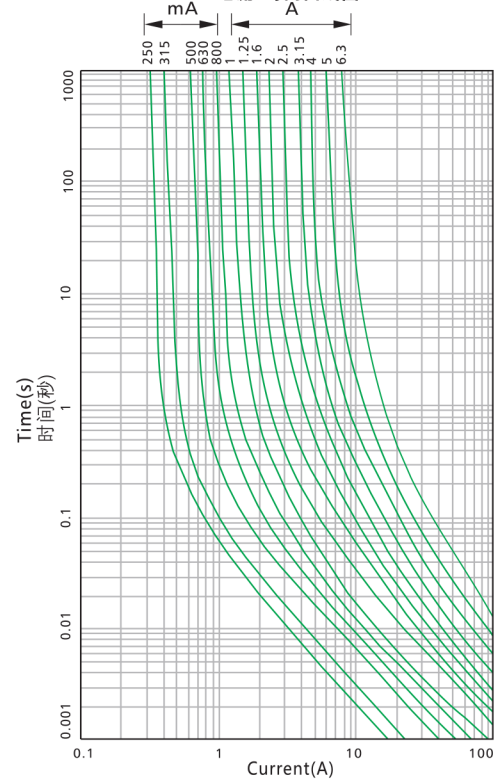

电气特性: Electrical Characteristics

| 额定电流的% % of Ampere Rating | 熔断时间 Opening Time |
|---------------------------|--------------------|
| 100% | 4 hours Min(大于4小时) |
| 135% | 1 hour Max(小于1小时) |
| 200% | 120 s Max(小于120秒) |
| 1000% | 10 ms Min(大于10毫秒) |

目录编号: Catalog No.A:250V B:125V 带引线产品目录编号后加"P":Suffix"P"for Lead Type After Catalog No.

| 目录编号 Catalog No. | 额定电流 Ampere Rating | 额定电压 Voltage Rating | 熔化热积分 ² T Melting Integral (A ² .S) | 认证 Approvals | | |
|------------------------|--------------------------|---------------------------|---|--------------|-----|-------|
| | | | | UL | cUL | UL US |
| 4E0125A/B | 125mA | 250V/125V | 0.008 | ● | ● | |
| 4E0160A/B | 160mA | 250V/125V | 0.015 | ● | ● | |
| 4E0200A/B | 200mA | 250V/125V | 0.025 | ● | ● | |
| 4E0250A/B | 250mA | 250V/125V | 0.040 | ● | ● | |
| 4E0315A/B | 315mA | 250V/125V | 0.075 | ● | ● | |
| 4E0350A/B | 350mA | 250V/125V | 0.09 | ● | ● | |
| 4E0500A/B | 500mA | 250V/125V | 0.28 | ● | ● | |
| 4E0630A/B | 630mA | 250V/125V | 0.42 | ● | ● | |
| 4E0750A/B | 750mA | 250V/125V | 0.70 | ● | ● | |
| 4E0800A/B | 800mA | 250V/125V | 0.80 | ● | ● | |
| 4E1100A/B | 1A | 250V/125V | 1.0 | ● | ● | |
| 4E1125A/B | 1.25A | 250V/125V | 2.5 | ● | ● | |
| 4E1150A/B | 1.5A | 250V/125V | 2.8 | ● | ● | |
| 4E1160A/B | 1.6A | 250V/125V | 3.5 | ● | ● | |
| 4E1200A/B | 2A | 250V/125V | 12.8 | ● | ● | |
| 4E1250A/B | 2.5A | 250V/125V | 18 | ● | ● | |
| 4E1300A/B | 3A | 250V/125V | 19 | ● | ● | |
| 4E1315A/B | 3.15A | 250V/125V | 21 | ● | ● | |
| 4E1350A/B | 3.5A | 250V/125V | 34 | ● | ● | |
| 4E1400A/B | 4A | 250V/125V | 52 | ● | | ● |
| 4E1500A/B | 5A | 250V/125V | 80 | ● | | ● |
| 4E1630A/B | 6.3A | 250V/125V | 115 | ● | | ● |

● 表示已获认证
● 表示认证中