

3J $\Phi 3.6 \times 10$ RoHS Compliant



玻璃保险丝管(快断型)

Glass Tube Fuse (Fast-Acting) 250V/125V




测试标准:
Testing Standard:
 IEC60127-1 IEC60127-3 GB9364.1 GB9364.3

额定分断能力:
Interrupting Rating:
 35A or 10In Whichever is greater


工作温度:
Operating Temperature:
 -55°C ~ +125°C

材料:
Materials:
 End cap: nickel plated brass
 Glass tube: glass
 Lead wire: tinned copper wire
 Inner cap: nickel plated brass

焊接方法:
Soldering Method:
 Wave soldering: 260°C, 10s max
 Manual soldering: 350°C, 5s max



Time-Current Characteristics
 电流-时间曲线图

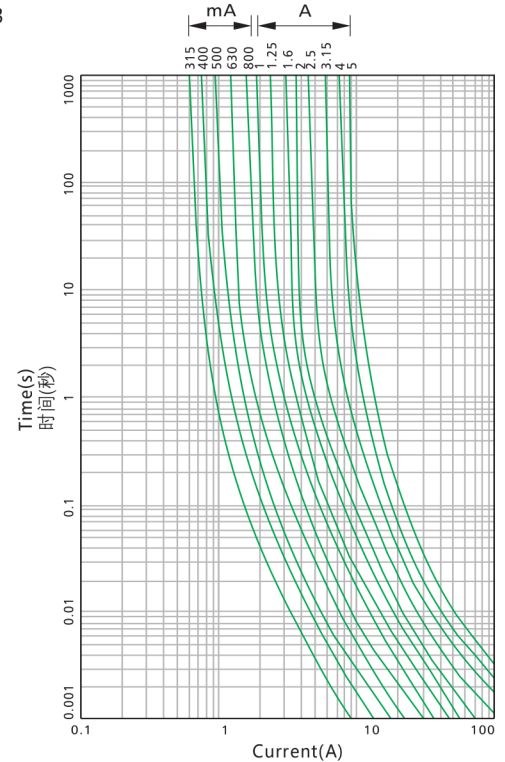

电气特性: Electrical Characteristics

额定电流的% % of Ampere Rating	熔断时间 Opening Time
210%	30 min Max(小于30分钟)
275%	10 ms ~ 3 s
400%	3 ms ~ 300 ms
1000%	20 ms Max(小于20毫秒)

目录编号: Catalog No. A:250V 带引线产品目录编号后加"P": Suffix "P" for Lead Type After Catalog No.

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	最大电压降(mv) Max Voltage Drop	熔化热能 ² T Melting Integral (A ² .S)	认证 Approvals			
					UL US	VDE	CQC	CCC
3J0100AP	100mA	250V	600	0.010	●			
3J0200AP	200mA	250V	480	0.015	●			
3J0250AP	250mA	250V	440	0.02	●	●	●	●
3J0315AP	315mA	250V	400	0.03	●	●	●	●
3J0400AP	400mA	250V	370	0.05	●	●	●	●
3J0500AP	500mA	250V	350	0.2	●	●	●	●
3J0630AP	630mA	250V	320	0.3	●	●	●	●
3J0800AP	800mA	250V	300	0.7	●	●	●	●
3J1100AP	1A	250V	280	0.8	●	●	●	●
3J1125AP	1.25A	250V	280	2.4	●	●	●	●
3J1160AP	1.6A	250V	250	3.5	●	●	●	●
3J1200AP	2A	250V	240	3.9	●	●	●	●
3J1250AP	2.5A	250V	200	4.7	●	●	●	●
3J1315AP	3.15A	250V	180	10.8	●	●	●	●
3J1400AP	4A	250V	180	13.9	●	●	●	●
3J1500AP	5A	250V	150	25.4	●	●	●	●
3J1630AP	6.3A	250V	150	53.7			●	

● 表示已获认证
 ● 表示认证中